SIEMENS

MAMMOMAT 1000/3000

SP

Service

Modification Instructions

Radiation Shield

© Siemens AB 1999
The reproduction, transmission or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of a utility model or design, are reserved.

English
Print No.: SPB7-230.092.14.01.02
Doc. Gen. Date: 09.99
Replaces: n.a

Chapter	Page	Revision
All	All	All

Page

1 Prerequisites 1 - 1

General . . . . . 1 - 1
Tools required . . . . . 1 - 1
Parts included . . . . . 1 - 1

2 Installation 2 - 1

Mounting the radiation shield . . . . . 2 - 1

Page

This page intentionally left blank.

General

This document describes how to mount a radiation shield on the generator.

Tools required

Standard installation tool kit.

Parts included

The installation kit 64 83 379 contains the following parts:

Pos	Amount	Part No.	Name
1	2	64 83 353	Vibration absorbing strip
2	4	92 48 147	Screw
3	1	65 27 118	This document

This page intentionally left blank.

Mounting the radiation shield

1. Insert sheet-metal strip (1) (additional radiation protection) into both stanchions.
2. Fit the lead-glass (2) into both vibration absorbing strip (3) and fix it softly with screws (4).

NOTICE **The screws must be mounted before the lead-glass is inserted in the stanchions.**

3. Fit the lead-glass (2) into the groove of one of the stanchions (5) and keep it in position while mounting the other stanchion (5).
4. Mount the stanchions and lead-glass unit (6) with 6 screws (7) onto the generator (8) (two persons are required).
5. Cover the holes with plastic caps (9).

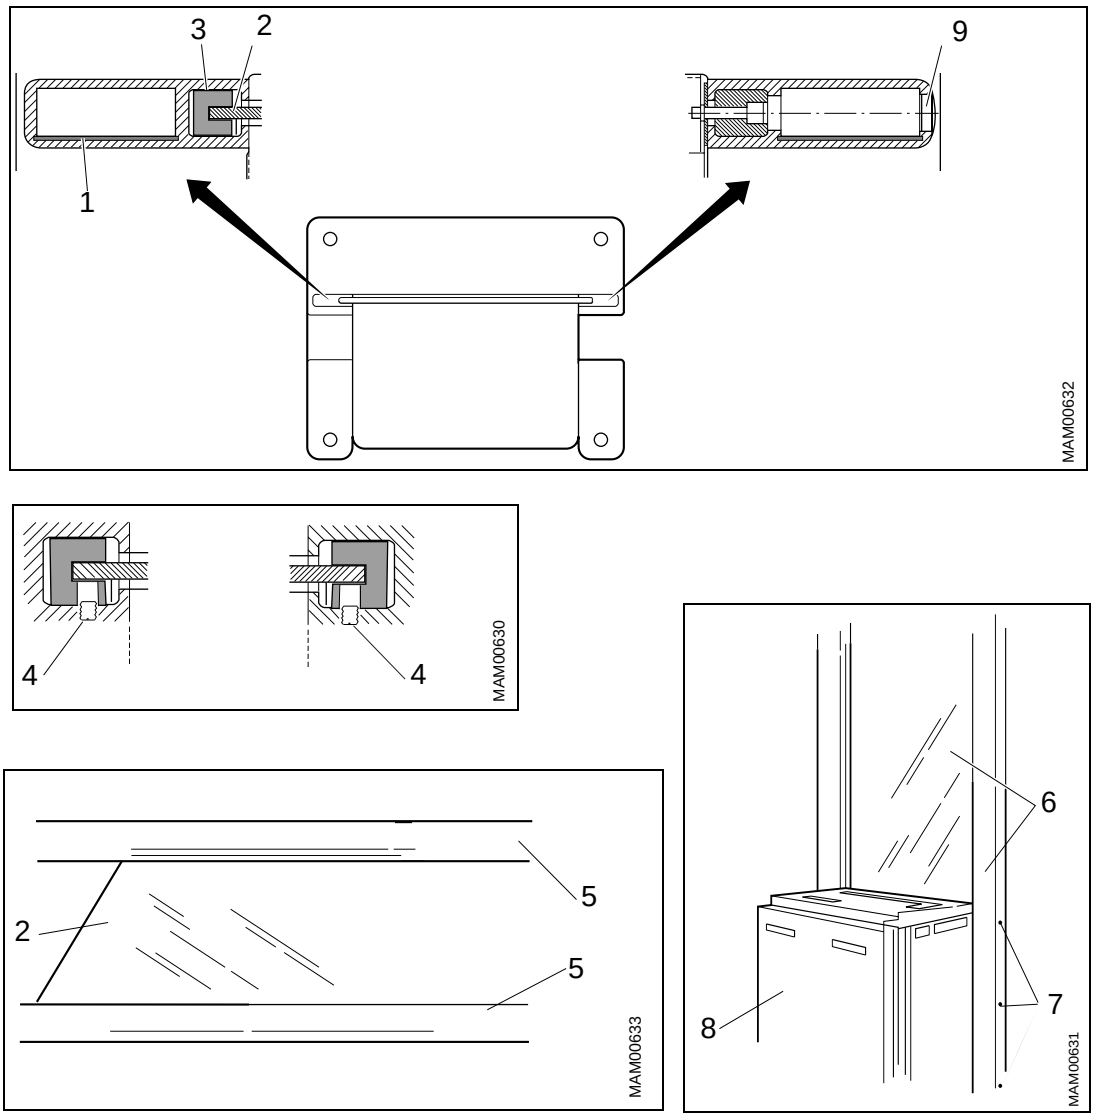

Fig. 1

This page intentionally left blank.